

ELECTRONICS Fume Extraction Solutions

V 1000 iQ

BOFA's V1000 iQ high end extraction system combines extremely large filter capacity with high airflow and pressure rates, making it the ideal choice for heavy duty applications that generate large amounts of particulate and gaseous organic compounds. This unit can cater for up to 15 operators as a centralised system or can be used to extract fumes from automated soldering machines.

Performance has now been further enhanced with the inclusion of several new features including BOFA's new iQ Operating System, making the new V1000 iQ one of the most advanced system available.

The iQ system takes performance and safety parameters to a new level and ensures that maintenance, downtime and ownership costs are kept to a minimum.

STANDARD FEATURES:

- iQ Operating System
- High airflow and pressure rates
- Reverse Flow Air filter technology
- DeepPleat DUO pre filter
- Automatic flow control system
- Real time airflow reading
- High contrast display
- 'Run safe' operation
- Remote diagnostics via USB
- Independent filter condition
 monitoring, display and warnings
- Combined HEPA/Gas filter
 incorporating ACF technology
- Filters with long life and low replacement cost

OPTIONAL FEATURES:


- VOC gas sensor
 - (Volatile Organic Compound)
- Remote stop / start interface
- Filter change / System fail signal
- Interfacing with host laser
- On-board compressor
- Larger silencing inlet/out boxes
- Optional filter medias

High volume extraction

soldering applications.

for hand and machine

For high performance and long filter life









Take a look at the iQ animation, which explains exactly why the patented BOFA iQ Operating System provides unrivalled control and data management for your fume extraction unit.



Patented Technology - Patent No: GB2 499 812

	UNITS - PART NUMBERS		OPTIONS				OPTION	
	Model	Voltage	Part No.	24V Stop / Start	Filter change / System failure signal	VOC Monitoring	On-board Compressor	Larger exhaust silencing boxes
	V 1000 iQ Stainless Steel	230V	E1272	A2001	A2002	A2003	A2007	
		115V	E1271					11000001
	V 1000 iQ Powder Coated	230V	E1262					A1060094
		115V	E1261					

	REPLACEMENT FILTERS - PART NUMBERS				
	Model	DeepPleat DUO Pre Filter	Combined HEPA/Gas Filter		
	V 1000 iQ	A1030222	A1030297		

ECHNICAL DATA					
	EU	US			
Dimensions (HxWxD)	1197 x 600 x 790mm	47.1 x 23.6 x 31.1"			
Cabinet Construction	Brushed stainless steel / Powder coated mild steel				
Airflow / Pressure	850m³/hr / 100mbar	500cfm / 100mbar			
Electrical Data	230v 1ph 50/60Hz Full load current: 12.8 amps / 2.2kw	115v 60/50Hz Full load current: 19.5 amps / 2.2kw			
Noise Level	< 63dBA (at typical operating speed)	< 63dBA (at typical operating speed)			
	< 58dBA - with rear silencing boxes fitted	< 58dBA - with rear silencing boxes fitted (at typical operating speed)			
Weight	140kgs	309lbs			
Approvals	CE				

DEEPPLEAT DUC SPECIFICATIONS		COMBINED HEPA/ SPECIFICATIONS	COMBINED HEPA/GAS FILTER SPECIFICATIONS		
Surface Media Area	30m² approx	Surface Media Area	7.5m² approx		
Filter Media	Glass Fibre	HEPA Filter Media	Glass Fibre		
Filter Media Construction	Maxi Pleat Construction with Webbing Spacers	HEPA Media Construction	Maxi Pleat Construction with Webbing Spacers		
Filter Housing	Zintec mild steel	Filter Housing	Zintec Mild Steel		
Filter Efficiency	F8 (95% @ 0.9 microns)	Treated Activated Carbon	34kgs		
		Filter Efficiency	99.997% @ 0.3 microns		

Other hose kits and filters are available. All of the above units are fitted with our standard filter combinations. For specific applications please call us for details. Replacement filters should always be ordered using the part number on the filters inside your extractor to ensure the correct filter is ordered. Datasheet correct at time of print.

WEIDINGER GmbH


Ringstraße 17 82223 Eichenau Deutschland

Geschäftsführer Philip Homami, Jürgen Dienst HRB 60470 München USt-IdNr.: DE 811262551

Kontakt Telefon: +49 (0)8141 / 36 36 - 0 Telefax: +49 (0)8141 / 36 36 - 155 info@weidinger.eu · www.weidinger.eu

AIRFLOW THROUGH FILTERS

Ā

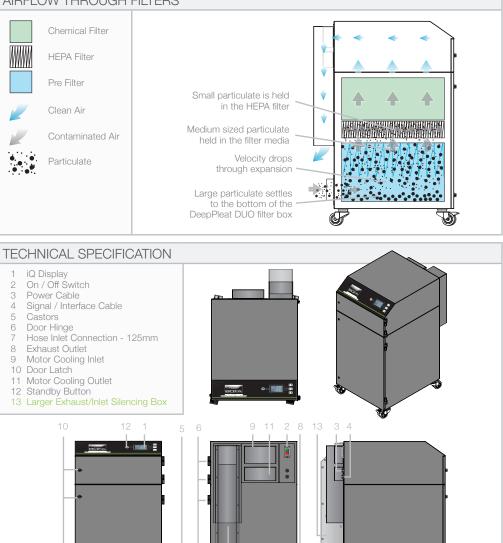



G